
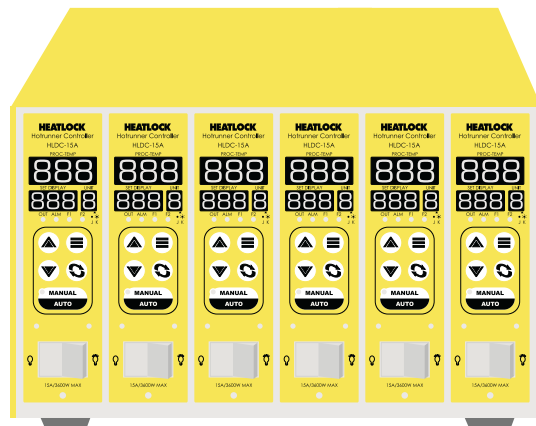


HLDC-15A

數控溫控箱

HEATLOCK®

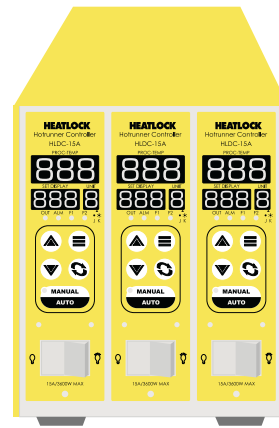

HLDC-15A controller

HLDC-3/15	3 zones	15A	include loom and loom connector.
HLDC-6/15	6 zones	15A	include loom and loom connector.
HLDC-10/15	10 zones	15A	include loom and loom connector.
HLDC-12/15	12 zones	15A	include loom and loom connector.

Features:

1. PID control unit, self tuning for accurate temperature control.
2. Automatic soft-start function for circuit protection to prevent heater short cut during start up.
3. Works in either automatic mode or manual % setting power output.
4. Works with J or K type thermocouple, built in alarm functions for open circuit/reversed t/c.
5. Can work with Celsius or Fahrenheit temperature scales.
6. Temperature control accuracy $\pm 1^{\circ}\text{C}$.
7. Max load 15A/3600W at 240Vac .
8. Power supply less than 3 zone 220V 50Hz, more than 3 zones 3 phase 380V 50Hz with built in phase switch protection circuit.
9. Exchangeable modular design according plastic industry standard, exchangeable PCB's.